



The Welch Allyn Propaq[®] CS

Vital signs monitoring where you need it, when you need it.

The Propaq CS is configurable with:


- Heart/Pulse rate*
- 3- or 5-lead ECG*
- Motion-tolerant noninvasive blood pressure*
- Temperature (2 channels)*
- Invasive blood pressure (up to 2 channels)
- Masimo SET[®] motion-tolerant pulse oximetry*
- or
- Nellcor OxiMax[®] pulse oximetry*
- Capnography (mainstream and/or sidestream)
- Impedance respiration/apnea*
- Acuity[®] Central Station interface (wireless/hardwire)
- Nurse call interface

*Standard Features


WelchAllyn[®]

Advancing Frontline Care[™]


Propaq® CS Specifications




Left Side AAMI Panel
(HP also available)




Right Side Panel




Sidestream CO₂ Option



Mainstream CO₂ Option



Nurse Call Option

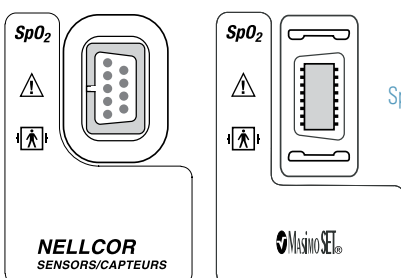

SpO₂ Options

General

- Adult/Paediatric/Neonatal factory/custom patient modes
- Electrosurgery interference suppression (ESIS): all channels except Impedance Respiration
- All channels electrically isolated
- Communications option
- Networks to Acuity® Central Station

ECG

- Automatic 3- and 5-lead detection
- **Selectable leads:** I, II, III, aVR, aVL aVF, V
- Lead fault detection with auto-reconfigure
- **Bandwidth:** 0.5 to 40 Hz monitor mode, 0.05 to 40 Hz extended mode (Adult); 0.5 to 120 Hz monitor mode, 0.05 to 120 Hz extended mode (Paediatric/ Neonate)
- AAMI 6-pin connector
- **Heart rate measurement range:** 25 to 300 bpm (display)
- **Heart rate accuracy:** ± 3 bpm or 3%
- Pacer detection and display
- Defib sync connector
- Real-time ECG output, delay < 3 msec
- ESU and defibrillator protected
- **Sweep speed:** 12.5, 25, and 50 mm/sec
- **User-selectable size (mV/cm):** 4, 2, 1, 0.5, 0.2
- **QRS tone:** high/med/low/off
- 4.2 sec waveform display at 25 mm/sec
- **QRS detector range:**
Adult or paediatric mode: 0.22 to 5.0 mV (RTI)
Neonatal mode: 0.1 to 5.0 mV
Neonatal width: 40 to 120 msec
Paediatric width: 40 to 120 msec
Adult width: 70 to 120 msec

Noninvasive Blood Pressure (NIBP)

- Oscillometric method
- Automatic (intervals between 1 and 60 min) and manual modes
- Quick action NIBP Start/Stop button
- TurboCuf: 5 min of repeated NIBP readings
- Systolic, diastolic, mean display
- On-screen manometer
- Store and view all data (up to 128 readings)
- Large NIBP numeric display format
- **Standard cuff sizes:** Neonate #1- #5, Infant, Child, Small Adult, Adult, Large Adult, Thigh
- Cuff overpressure protection
- **Typical measurement time:** 30 to 45 secs
- Smartcuf® NIBP technology

NIBP

Patient mode-specific operation:

Neonate mode

- Initial cuff inflation pressure: 90 mmHg
- Maximum allowable cuff pressure: 132 mmHg
- Systolic range: 25 to 120 mmHg
- Diastolic range: 10 to 105 mmHg
- Mean range: 10 to 110 mmHg

Paediatric mode

- Initial cuff inflation pressure: 120 mmHg
- Maximum allowable cuff pressure: 170 mmHg
- Systolic range: 30 to 160 mmHg
- Diastolic range: 15 to 130 mmHg
- Mean range: 15 to 140 mmHg

Adult mode

- Initial cuff inflation pressure: 160 mmHg
- Maximum allowable cuff pressure: 270 mmHg
- Systolic range: 30 to 260 mmHg
- Diastolic range: 20 to 235 mmHg
- Mean range: 20 to 255 mmHg

Temperature

- Two YSI 400/700 compatible channels
- Range: 0 to 50 °C
- Display: T1, T2 and Delta temp
- Units: °C or °F
- Accuracy: ± 0.1 °C (10 to 50 °C), ± 0.2 °C (0 to 10 °C)
- Optional HP side panel has one temp channel for YSI 400 probes with HP connector

IBP

- One or two channels
- Pressure range: -30 to 300 mmHg
- Pulse rate measurement range: 25 to 250 bpm
- Display: 5 scales or semiautomatic rescaling
- Format: Sys/Dia/Mean, user selectable
- User-selectable labels: P1, P2, ART, PA, CVP, ICP, UA, UV Neonate mode only
- Transducer requirements: 5 µV/V/mmHg
- Zero adjustment: ± 200 mmHg including transducer offset
- Numeric pressure accuracy: ± 2 mmHg or 2% of reading, plus transducer error
- Standard 6-pin connector, or HP 12-pin on HP-compatible side panel option

Impedance Pneumography Respiration

- Two user-selectable leads: RA-LA, RA-LL
- Automatic cardiovascular artifact (CVA) rejection
- Respiration rate range:
Adult/Paediatric modes: 0 (apnea), 2 to 150 RPM
Neonate mode: 0 (apnea), 3 to 150 rpm
- Respiration detection threshold: 140 milliohms or 2X CVA, whichever is greater
- Respiration rate accuracy:
 ± 2 breaths/min or ± 2%
- Apnea alarm delay settings:
Adult/Paediatric modes: 6, 10, 15, 20, 25, 30 sec
Neonate mode: 6, 10, 15, 20 sec
- Sweep speed: 3.13, 6.25, 12.5 mm/sec

Pulse Oximetry (SpO₂)

Masimo®

- Masimo SET® sensors
- Waveform and pulse amplitude meter
- Pulse tone pitch indicator
- Saturation range: 1 to 100%
- Probe accuracy: 25° to 41°
No Motion:
Adult/Paediatric: 70 to 100% ± 2 digits, 0 to 69% unspecified
Neonatal: 70 to 100% ± 3 digits, 0 to 69% unspecified
During Motion:
Adult/Paediatric/Neonatal: 70 to 100% ± 3 digits, 0 to 69% unspecified
- Pulse rate measurement range (Adult Paediatric/Neonatal):
No Motion: 26 to 239 bpm
During Motion: 26 to 239 bpm
- Pulse rate accuracy:
No Motion: ± 3 digits
During Motion: ± 5 digits

Nellcor

- Nellcor® OxiMax sensors
- Waveform and pulse amplitude meter
- Pulse tone pitch indicator
- Saturation range: 1 to 100%
- Probe accuracy: 70 to 100%, 28 to 42 °C, DS-100A: ±3
- Pulse rate measurement range: 25-249 bpm
- Pulse rate accuracy: ± 3 bpm

CO₂ Option Display

- Screen display: CO₂ waveform and EtCO₂ and INCO₂ (when in alarm) numerics
- Waveform scale: (maximum) 0 to 100 mmHg, 0 to 14%, 0 to 14 kPa
- Numeric range display: EtCO₂: 0 to 99 mmHg, 0 to 13.2 kPa, 0 to 23.1%; INCO₂: 8^a to 25 mmHg, 1.1^a to 5 kPa, 1.1^a to 5%
- Units: mmHg, kPa, %; user-selectable
- Sweep speed: 3.13, 6.25, 12.5 mm/sec; user-selectable
- Response modes:
 - Fast: 15 sec sampling time period;
 - Normal: 30 sec sampling time period;
 - Slow: 45 sec sampling time period
- Gas compensation: Off: CO₂ value = calculated CO₂ value; O₂ > 50%, No N₂O: CO₂ value = calculated CO₂ value x 1.03; N₂O > 50%: CO₂ value = calculated CO₂ value x 0.952
- Alarm limit ranges: EtCO₂: 0 to 99 mmHg, 0 to 13.2 kPa, 0 to 13.2%; INCO₂: 2 to 25 mmHg, 0.2 to 5 kPa, % (no lower limit)
- Resolution: 1 mmHg
- Accuracy:
 - Mainstream^b: 0 to 30 mmHg, ± 3 mmHg 31 to 99 mmHg, ± 10% of value
 - Sidestream^c: 0 to 30 mmHg, ± 3 mmHg 31 to 99 mmHg, ± 10% of value
- Altitude Error: ± 0.4%/304.8 m

Breath Rate Display

- Screen display: Numeric
- Breath rate (BR) source: When CO₂ is active, CO₂ is the BR source. Otherwise, RESP from ECG is the RR source
- Units: Breaths/Minute
- Range:
 - Adult/Paed: 0 (apnea), 2 to 150 breaths/min
 - Neonate: 0 (apnea), 3 to 150 breaths/min
- Resolution: ± 1 breath/min
- Accuracy: ± 1 breath/min or ± 5%, whichever is greater^d
- Alarm limits range:
 - Adult/Paed: 2 to 150 breaths/min
 - Neonate: 3 to 150 breaths/min

CO₂ Performance

- Per ISO 9918:1993(E)/EN 864:1996

Apnea Alarms and Tickets

- Apnea ticket: Set to auto print after apnea event and after 1 minute continued apnea
- Apnea alarm accuracy: ± 2 sec
- Apnea delay setting:
 - Adult/Paed: 6, 10, 15, 20, 25, 30 seconds
 - Neonate: 6, 10, 15, 20 seconds

Barometric Pressure

- Pressure compensation: automatic
- Operating range: -610 to 4,572 m (817 to 429 mmHg)
- Screen display: Numeric (CO₂ Status Window)
- Units: mmHg or kPa or %
- Accuracy: ± 3 mmHg or 2.5% of difference from calibration pressure, whichever is greater

Sidestream CO₂ Option (SSCO₂)

- Sensor type: Sidestream, internal
- Principle of operation: Nondispersive, infrared, single-beam, single-path/wavelength, ratiometric
- Operating ambient temperature: 5 to 40 °C
- Startup time: 30 seconds typical, 3 minutes maximum
- Rise time: 240 ms (10% to 90%) at 175 ml/min
- Delay time: 1.12 seconds maximum^e
- Total system response time: 1.36 seconds (Rise Time and Delay Time)^e
- Calibration: Verify semiannually, calibrate only as required
- Sampling chamber: Internal (replaceable by service technician)
- Pneumatic and exhaust system: Integral
- Barometric pressure compensation: Automatic
- BTPS, ATPS, STPD: CO₂ value = calculated CO₂ value x 0.977
- Sampling line: 2.13 m sampling line, ID 1.4 mm, for use with disposable single-use cannula (CO₂ only or CO₂ sampling/O₂ delivery)
- Flow rate: 90 or 175 ml/min, user-selectable

^a Lower if in alarm

^b Based on these airway conditions: sensor temperature 42 °C, airway adapter temperature = 33 °C, water vapor pressure = 38 mmHg; standard gas mixture = CO in balance air, fully hydrated at 33 °C; barometric pressure = 760 mmHg and flow = 60 ml/min

^c Based on the following additional airway conditions: sample line = 2.13 m, 1.4 mm ID; sample flow rate = 175 ml/min; respiratory rate ≤ 50 breaths/min, stable to ± 3 breaths/min; inspired/expired time ratio = 1:2; barometric pressure = 760 mmHg

^d For Sidestream CO₂, this applies only for BR ≤ 60

^e Based on the following additional airway conditions: sample line = 2.13 m, 1.4 mm ID; sample flow rate = 175 ml/min

Mainstream CO₂ Option (MSCO₂)

- CO₂ waveform, EtCO₂, INCO₂ (INCO₂ when in alarm), Apnea and Breath Rate display
- Waveform rise time: < 120 msec (to 90% after step change)

Mainstream CO₂ Sensor

- Mainstream NDIR single-beam, single path/wavelength, ratiometric
- Warm-up time (CO₂ sensor and monitor): 45 sec typical, 3 minutes maximum
- Automatic zeroing
- No routine calibration
- Operating altitude: -610 to 4,572 m (817 to 429 mmHg)
- Dimensions: 2.5 cm H x 2.6 cm W x 2.0 cm L
- Weight: 12 g
- Cable length: 3.05 m nominal

CO₂ Airway Adapters

- Disposable or multi-use
- Size: 15 mm ID (meet ISO specifications)
- Single or multi-use adult/paediatric airway adapter for patients who weigh ≥ 5 kg: Added deadspace: < 6 cc
- Single-use low-deadspace airway adapter for patients who weigh < 5 kg: Added deadspace: < 0.6 cc

Wireless Option

- FlexNet 802.11a wireless radio deployed on dedicated 802.11a or enterprise 802.11a/b/g networks
- Industry standard IEEE 802.11a/b/g compliant
- Frequency: 2.4–2.5, 5.15–5.25, 5.25–5.35, 5.47–5.725, 5.725–5.85 GHz RF
- Wireless monitors per Access Point: 20 (maximum)

Nurse Call Option

- Maximum switch current: 1A
- Maximum switch voltage: 30 V AC/DC
- Isolation: 1500 Vrms
- Alarm relay: Energised during apnea alarm or patient alarm
- Customised cable: One end is a 4-pin plug, compatible with the monitor's nurse call connector; the other end must be customised to connect to the local nurse call system

Printer Option

- Thermal sensitive dot
- Numeric annotation: date, time, all active parameters, patient name if connected to Acuity
- Number of waveforms printed simultaneously: up to 3
- Print speeds: 6.25, 12.5, 25.0 mm/sec
- Format: 53 mm wide print area on 60 mm wide paper

Operating modes:

- Continuous: start/stop real-time printouts with all active numerics and up to 3 waveforms
- Snapshot: 8 sec (32 sec for CO₂/Resp) of immediate history for all active numerics and up to 3 waveforms
- Alarm print: 20 seconds total/12 seconds prior to alarming parameter
- Auto print: Snapshot printout every 15 or 30 min, or 1, 2 or 4 hours
- Trend print: On demand or Auto Trend every 4 hours. Up to 8 hours in tabular format.
- OxyCRG trend print: Print-only function (CO₂ or Resp must be installed): 2 min printout of trended HR/PR and SpO₂ numerics and compressed CO₂ or Resp waveforms (CO₂ is priority source), with annotation and MIN/MAX tabular report
- OxyCRG on alarm: Set to print out 60 sec after HR/PR or SpO₂ alarm or 75 sec after BR/RR or apnea alarm
- Apnea ticket: Auto print HR/PR, SpO₂ and elapsed time after apnea event and after 1 minute of continued apnea
- Cuff ticket: Auto print NIBP, HR/PR, SpO₂, CO₂ and RR/BR after each NIBP reading

Alarms

- **All parameters:** upper/lower limits
- **All parameters:** Adult/Paediatric/Neonate patient mode-specific limits
- Factory default or programmable settings for all patient modes
- **Alarm indicator:** red
- **Alarm(s) off indicator:** yellow
- **Audible alarm tone:** high/med/low
- **Alarm suspend:** 90 seconds
- One-button Stat Set for all alarm limits (except Apnea Delay)
- **EQ Alert:** yellow

Trends

- Tabular numeric format
- All parameters trended/viewable
- **Resolution:** non-NIBP trends entered every 2 min
- NIBP trends entered after each reading
- **Duration:** 5 hours non-NIBP trends (up to 150 readings) 8 hours NIBP trends (up to 128 readings)
- Page up/down trend view

Inservice Mode

- Includes two sets of simulated patient data including waveforms, for training and education

Colour Active Matrix Display

- **Type:** TFT (Thin Film Transistor) LCD module
- **Resolution:** 640 x 480 pixels, 1 pixel = R+G+B dots
- **Active viewing area:** 170.9 x 129.6 mm
- **Pixel pitch:** 0.267 mm
- **Viewing angle:** U/D 40°, R/L 60° (typical), ≥ 10:1 contrast ratio
- **Contrast ratio:** 150:1 (typical); measured in dark room at centre of screen
- **Display colour:** 18-bit (6 bits per primary color)
- **Waveforms and matching numerics:** Predefined
- **Luminance:** 200 cd/m² (typical); measured at saturation point
- **Response time:** 40 ms (maximum); "white to black"

Environmental

- **Operating temperature:** 5 to 40 °C (monitor), 5 to 40 °C (printer)
- **Operating relative humidity:** 15% to 95%, noncondensing (MIL STD 810E), printer 35% to 85%, noncondensing (MIL STD 810E)
- **Operating altitude:** -610 to 4,572 m (817 to 429 mmHg)
- **Shipping/storage temperature:** -20 to 60 °C
- **Shock:** 50 g (monitor); 30 g (expansion module/printer)
- **Random vibration:** Designed to meet RTCA DO-160D, category C (monitor)
- **Electromagnetic compatibility (EMC):** per EN60601-1-2, 1993
- Drip-proof per IEC 529, level IPX1 (monitor)

Physical

- **Monitor (including handle):**
Size: 20.8 cm (H) x 24.4 cm (W) x 14.1 cm (D)
Weight: 3.4 kg
- **Monitor with SpO₂ Module:**
Size: 20.8 cm (H) x 24.4 cm (W) x 19.7 cm (D)
Weight: 4.9 kg
- **Monitor with Expansion Module:** (with Printer/SpO₂/MSCO₂)
Size: 28.8 cm (H) x 24.4 cm (W) x 19.7 cm (D)
Weight: 6.5 kg

Power

- Rechargeable sealed lead acid internal battery pack
- Internal recharger
- **Input voltage:** 12 to 28 VDC, 25 W
- **AC power adapter:** 100 to 120 VAC, 50 to 60 Hz (North America/Japan); 220 to 240 VAC, 50 to 60 Hz (International)
- **Operating time on battery, typical*:** Monitor with SpO₂ option: 4 hours; Monitor with Expansion Module (Printer, SpO₂/CO₂): 3 hours; Monitor only: 2 hours
- **Battery recharge time:** 6 to 8 hours (when monitor OFF)
- **Battery recharge time:** 8 to 12 hours (when monitor ON)

Certifications/Standards

- Complies with relevant AAMI, IEC, EN, CSA and UL standards. CE Marked according to the European Medical Device Directive. CSA Certificate of Compliance for use in the U.S. and Canada
VA Contract V797P-3486k
DSCP Contract SP0200-97-D-8021
- * Fully charged, new battery at 25 °C, NIBP and Snapshot (if applicable) every 15 minutes, all accessories used.



All Propaq CS vital signs monitors come standard with Smartcuf technology, a new standard in NIBP accuracy. This patented software offers industry-leading performance and accuracy in the presence of motion artifacts.



Only Masimo SET SpO₂ sensors, including LNOP durable adhesive and NR value disposable sensors, should be used with Masimo pulse oximetry. Masimo, Masimo SET, LNOP, and NR are registered trademarks of Masimo Corporation.



Only Nellcor® OxiMax® pulse oximetry sensors should be used with the Nellcor pulse oximetry option. NELLCOR and OxiMax are registered trademarks of Nellcor Puritan Bennett, Inc.



Welch Allyn Acuity® Central Monitoring Station utilizes Aruba Mobile Edge Architecture for best-in-class HIPAA security, a superior voice and data network solution and high availability for critical applications.

Welch Allyn U.K. Ltd.

Cublington Road, Aston Abbotts, Buckinghamshire HP22 4ND, England
Tel: 0 207 365 6780 Fax: 0 207 365 9694

Welch Allyn European Customer Service

Navan Business Park, Dublin Road, Navan, County Meath, Ireland
Tel: +353 46 906 7790 Fax: +353 46 906 7754

Welch Allyn PTY. LTD, S. Africa

394 Surrey Ave, Ferndale, Randburg 2194 South Africa
P O Box 809, Fontainebleau, South Africa 2032
Tel: 0 11 777 7555 Fax: 0 11 777 7556

www.welchallyn.com

All rights reserved. Acuity, Propaq and Smartcuf are registered trademarks and FlexNet is a trademark of Welch Allyn. Other trademarks mentioned are for identification purposes only and are owned by their respective companies.

© 2009 Welch Allyn SM2517EU Rev D

WelchAllyn®

Advancing Frontline Care™